

**DESCRIPTION: AC-DC Power Supply**

**SERIES: P1XE12JP**

## Features

- Output voltages from 3.3V to 24V
- 100-240Vac Universal AC input
- Energy efficiency level VI & CoC Tier2
- Protections: OVP OCP SCP
- Standard: IEC 62368
- Applications: Audio/Video, Information and Communication technology equipment



## Certificates



## Model

**Order NO. P1XE12 JP - zzz yyyy**

**1 2 3 4**

1. Series number
2. Wall plug:
 

MM=Interchangeable AC plug	JP=Japanese fixed AC plug
US=American fixed AC plug	AU=Australian fixed AC plug
EU=European fixed AC plug	CN=China fixed AC plug
BR=Brazilian fixed AC plug	GB=United Kingdom fixed AC plug
SA=African fixed AC plug	KR=Korean fixed AC plug
IN=Indian fixed AC plug	
3. Output voltage: 033=3.3V, 240=24V
4. Output current: 0166=1.66A, 1500=15A

Model number	Power (W)	Output voltage (V)	Output current (A)
P1XE12JP-0330200	6.6	3.3	2.00
P1XE12JP-0500200	10	5.0	2.00
P1XE12JP-0600166	10	6.0	1.66
P1XE12JP-0750133	10	7.5	1.33
P1XE12JP-0900133	12	9.0	1.33
P1XE12JP-1200100	12	12.0	1.00
P1XE12JP-1500080	12	15.0	0.80
P1XE12JP-1800066	12	18.0	0.66
P1XE12JP-2400050	12	24.0	0.50

DESCRIPTION: **AC-DC Power Supply**

SERIES: **P1XE12JP**

## Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input voltage	90	100-240	264	Vac	
Input frequency	47	50/60	63	Hz	
Input current			0.35	A	100Vac
No load power consumption			0.1	W	115/230Vac

## Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Voltage tolerance		±5.0		%	
Line regulation		±5.0		%	
Turn on delay			3	S	90Vac at full load
Ripple & Noise			200	mV	20MHz Bandwidth, 0.1µF & 10µF capacitor

## Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating temperature	0		40	°C	
Operating humidity	20		90	%	RH, non-condensing
Storage temperature	-10		60	°C	
Storage humidity	10		95	%	RH, non-condensing
MTBF	When the power supply is operating within the limits of this specification, the MTBF shall be at least 50000 hours at 25°C (MIL-HDBK-217F).				

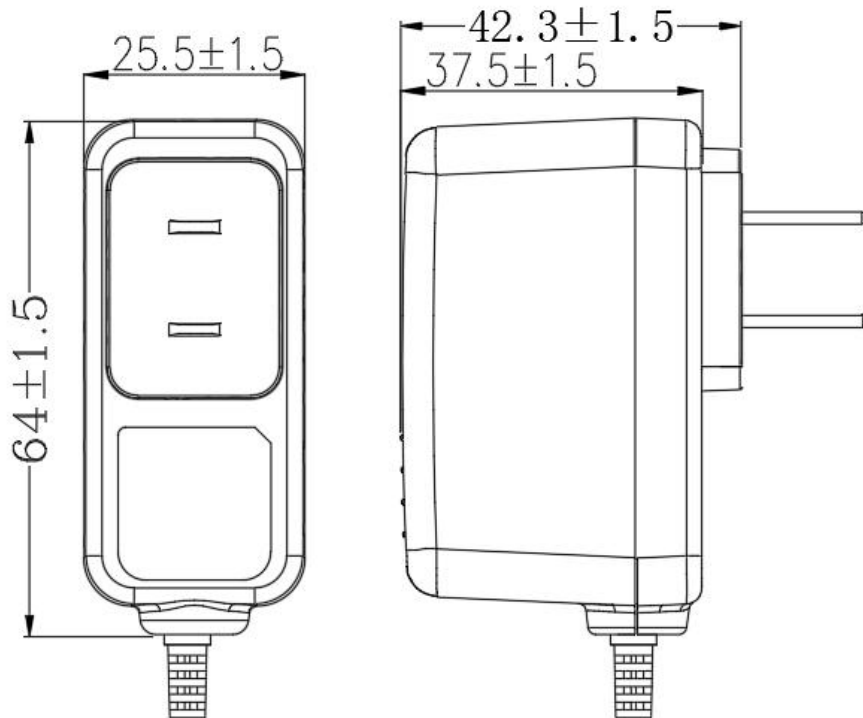
## Protections

Characteristic	Descriptions
Over current protection	105 ~ 150% rated output current. Protection type: Hiccup mode, which recovers automatically once the fault condition is removed.
Over voltage protection	Overvoltage protection must be included in the circuit to ensure that a single component failure does not cause an overvoltage.
Short circuit protection	The output can withstand a continuous short circuit without damage due to the hiccup mode protection feature, which automatically recovers once the fault condition is removed.

DESCRIPTION: **AC-DC Power Supply**

SERIES: **P1XE12JP**


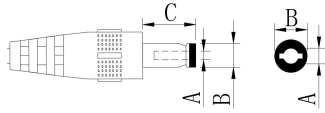


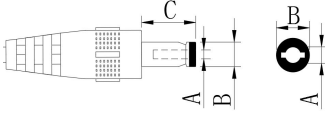

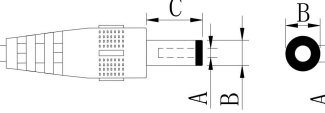

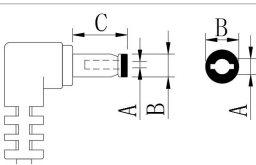

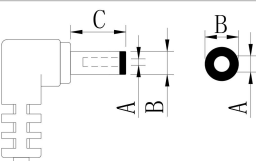

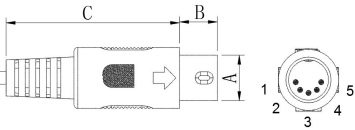

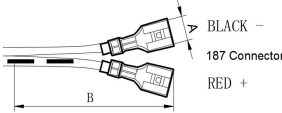

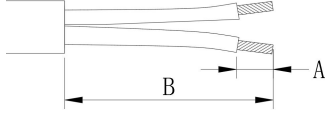

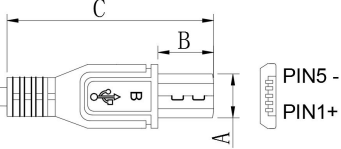
## Mechanical



**DESCRIPTION: AC-DC Power Supply**

**SERIES: P1XE12JP**

## DC Plugs

Serial No.	Outline		Notes
01 Tuning fork style (Standard plug)			A2.5*B5.5*C11mm 
02 Tuning fork style			A*B*C(mm) 2.5*5.5*8    2.5*5.5*9 2.5*5.5*9.5    2.5*5.5*10 2.5*5.5*11    2.5*5.5*12 2.5*5.5*13    2.5*5.5*14
03 Barrel style			
04 Tuning fork style			2.1*5.5*8    2.1*5.5*9 2.1*5.5*9.5    2.1*5.5*10 2.1*5.5*11    2.1*5.5*12 2.1*5.5*13    2.1*2.5*14
05 Barrel style			1.35*3.5*8.5    1.35*3.5*10  1.0*3.0*10    1.0*3.3*10
06 DIN 5 Pin (male)			A13*B8.0*C46mm PIN1 V- PIN5 V+
07 187 Connector			B50mm
08 Stripped and tinned leads			A5.0*B35mm
09 Micro-USB			
10 Type-C	